

**SURFboard® SB6120 Series eXtreme Cable Modem**

- A** Power On Self Test (POST). If LED remains off, modem is faulty.
- B** Scanning downstream frequencies.
- C** Scanning upstream frequencies.
- D** Downstream and upstream acquired. Modem processing for DHCP, TFTP, and TOD.
- E** Ready. PC/Activity is solid when a CPE is connected and blinks when transmitting or receiving data.
- F** Powered off.
- G** Modem is successfully registered but Network Access Control (NACO) is disabled via DOCSIS® configuration file.
- H** Performing firmware upgrade.

**LED Status**


Notes	Power	Receive	Send	Online	Link	
A						Power On
B						Downstream Scan
C						Upstream Range
D						Network Connect
E						LINK/Channel Bond
F						Power Off
G						Network Access Off
H						Firmware Upgrade in Progress

- On (Receive and Send - Connected Single Channel)  
(Link - 10Base-T or 100Base-T Ethernet)

- Off

- On (Receive and Send - Connected Bonded Channel)  
(Link - High-speed Gigabit Ethernet)

- Flashing

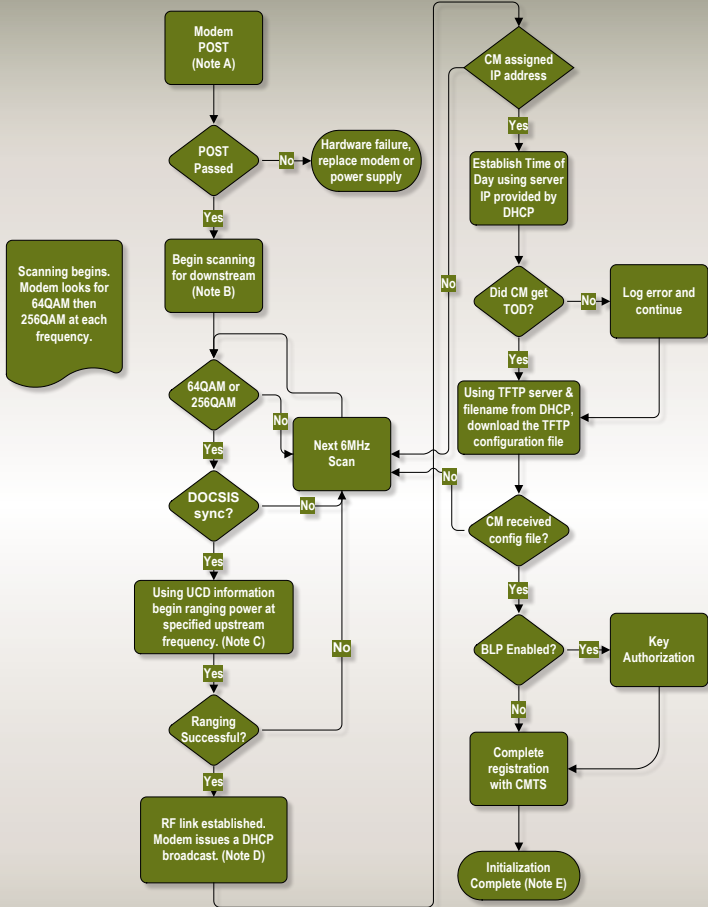

Motorola, the stylized M Logo, and SURFboard are registered in the US Patent & Trademark Office. DOCSIS is a registered trademark of Cable Television Laboratories, Inc. All other product or service names are the property of their respective owners.

© Motorola Inc. 2009. All rights reserved.

571642-001-a 05/09