




Symbol SE1224HP

OEM Scan Engines

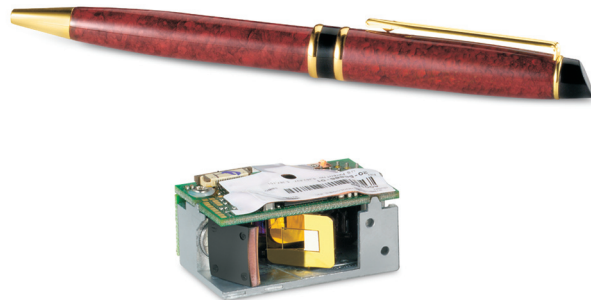

FEATURES

High-performance reader with fuzzy logic decode capability

Premium scanning for all 1D codes including poorly printed, damaged or low contrast bar codes

Supports new RSS symbologies in addition to standard 1D symbols

Protects your investment without compromising form factor

Compact, single board design

Optimized for quick and easy integration

3.3V and 5V versions available

Supports extended portable applications

High performance decoded scan engine

The Symbol SE1224HP scan engine is built on fuzzy logic processing to deliver a new level of performance for OEM bar code scanning devices. With its flexible reading range and superior scanning of poorly printed symbols, adding this powerful decoded scan engine to your design extends the capabilities of your solution in a variety of industries and applications. Now handheld computers, medical instruments, diagnostic equipment, lottery terminals, vending machines, robotics and countless other appliances can all be equipped with the leading-edge scanning technology and reliability that is available only from Motorola.

Compatibility plus flexibility protects your investment

Your hardware investment is protected when you use the Symbol SE1224HP. The standard Simple Serial Interface (SSI) communication protocol ensures compatibility with our other decoded scan engines, helping save you time and money

when upgrading the capabilities of your designs. The Symbol SE1224HP integrates into your device seamlessly with the dimensions of an undecoded Symbol SE1200HP and the electrical interface of a Symbol SE1223HP. The Symbol SE1224HP also supports Reduced Space Symbologies® (RSS) as well as existing 1D symbologies without compromising the form factor of your OEM device.

Proven technology to enhance your solutions

With millions of installations worldwide, our OEM devices are proven to deliver high reliability and superior performance, ensuring the accurate and quick capture of data and images in your mission-critical applications and devices. In addition, an easy-to-integrate design and expert assistance from our world-class OEM support team enable you to bring your systems to market quickly and cost effectively. For more information, access our global contact directory at www.symbol.com/contact or visit us on the web at www.symbol.com/se1224hp

SPECIFICATION SHEET

SYMBOL SE1224HP
OEM scan engines

Simple Serial Interface (SSI) software

Provides a migration path to other SSI scan engines with advanced features/functionality to help you keep costs to a minimum

650 nm bright laser diode

Scan line is easy to see even in outdoor applications

Dual-scan angle switches from standard to narrow under software control

Offers fast, accurate bar code reading on menus and pick lists

Metal chassis

High shock rating for commercial, industrial or retail applications

Symbol SE1224HP Specifications

Physical Characteristics		Performance Characteristics	
Dimensions:	.75H x 1.51W x 1.38D (in) 19.1H x 38.35W x 35.05D (mm)	Light Source:	Visible Laser Diode 650 nm
Weight:	1.33 oz./37 g	Scan Rate:	35 (± 5) scans/sec (bi-directional)
Configuration:	decoded	Scan Angle:	42° (typical), 30° (narrow)
Interface:	SSI Control over TTL Serial on a 12 pin ZIF connector	Scan Patterns:	Linear
User Environment		Minimum Print Contrast:	Minimum 25% absolute dark/light reflectance measured 650 nm
Ambient Light:	Artificial: 450 ft. candles (4,844 Lux) Sunlight: 8,000 ft. candles (86,112 Lux)	Symbologies:	All major 1D bar codes
Operating Temp.:	-22° to 140°F (-30° to 60°C) chassis temp.	Programmable Parameters:	Laser On Time, Aim Duration, Power Mode, Trigger Bi-directional Redundancy, Symbology Types/Lengths, Data Formatting, Serial Parameters, Beeper Tone
Storage Temp.:	-40° to 158°F (-40° to 70°C)	Scan Angle:	at 42°
Humidity:	5% to 95% non-condensing	Ranges - 1D codes:	5 mil: Code 39; 2.5:1 - 80% MRD: 4.5 - 9.25 (in) / 11.43 - 23.5 (cm) 7.5 mil: Code 39; 2.5:1 - 80% MRD: 4.25 - 14.75 (in) / 10.79 - 37.47 (cm) 13 mil: 100% UPC - 80% MRD: 3.25 - 26 (in) / 8.26 - 66.04 (cm) 20 mil: Code 39; 2.2:1 - 80% MRD: 2 - 41.5 (in) / 5.08 - 105.41 (cm) 40 mil: Code 39; 2.2:1 - 80% MRD: 3.25 - 70.75 (in) / 8.26 - 179.79 (cm) 55 mil: Code 39; 2.2:1 - 80% MRD: 4.5 - 86 (in) / 11.43 - 228.6 (cm)
Power:	SE-1224HP-I000AR: 5VDC ± 10% SE-1224HP-I001AR: 3.3VDC ± 10%		
Scan Current:	140 mA typical		
Standby Current:	60 uA		
Shock:	2,000 G		
Regulatory			
Laser Classification:	Intended for use in CDRH /IEC 825 Class II devices		
Electrical Safety:	UL, VDE, and CUL recognized component laser		
Environmental:	RoHS compliant		



MOTOROLA

motorola.com

Part number SS-SE1224HP Printed in USA 03/08. MOTOROLA and the Stylized M Logo and Symbol and the Symbol Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. ©2008 Motorola, Inc. All rights reserved. For system, product or services availability and specific information within your country, please contact your local Motorola office or Business Partner. Specifications are subject to change without notice.